Catálogo de productos 2026

LIGHT IN MOTION

SOLUCIONES DE ILUMINACIÓN
PARA ESPACIOS QUE INSPIRAN

Iluminación LED · Perfiles · Sistemas magnéticos
Fuentes · Accesorios

Novalux
Lighting fixtures

TIRAS LED Y CONTROLADORES

LED STRIPS
& CONTROLLERS

01

COB LED STRIP

12V · 10 mm · 528 LED/m

WARM WHITE 250 m

NEUTRAL WHITE 250 m

COOL WHITE 250 m

COB · 12V DC · 10 mm · 528 LED/m

02

COB LED STRIP RGBW

24V · 12 mm · 784 LED/m

R G B W

COB · 24V DC · 12 mm · 784 LED/m

03

RGBW REMOTE CONTROLLER

DC 12-24V RGBW Remote controller

RGBW · 12-24V DC · RF 2.4G

04

COB LED STRIP RGBCW

24V · 12 mm · 840 LED/m

R G B C W

COB | 24V DC | 12 mm | 840 LED/m

05

RGBCW REMOTE CONTROLLER

DC 12-24V RGBCW Remote controller

RGBCW | 12-24V DC | RF 2.4G

06

RGBIC LED STRIP

12V · 10 mm · 60 LED/m

RGBIC | 12V DC | 10 mm | 60 LED/m

07

RGBIC BLUETOOTH REMOTE CONTROLLER

DC 12-24V RGBIC Bluetooth Remote controller

RGBIC | 12-24V DC | Bluetooth | 16 Million Colors

08

SMD2835 LED STRIP

DC 12V · 8mm width · 120 LEDs/m.

650 meters warm white,
500 meters neutral white, 500 meters cool white

SMD2835 | DC 12V | 8mm | 120 LEDs/m

Catálogo de productos

2026

PERFILES

ALUMINUM PROFILES
FOR LED STRIPS



09

ALUMINUM PROFILE FOR LED STRIP

17.4x12mm, 1meter long

17.4x12mm | Aluminum | For LED Strip | 1meter long

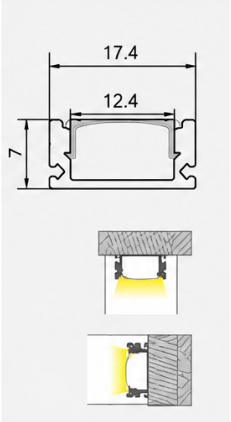

10

ALUMINUM PROFILE FOR LED STRIP

17.4x7mm, 1meter long

17.4x7mm | Aluminum | For LED Strip | 1meter long

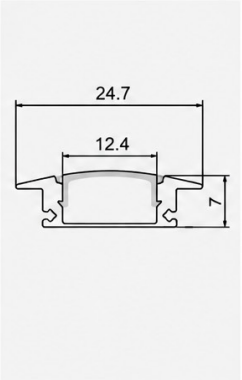

11

ALUMINUM PROFILE FOR LED STRIP

24.7x7mm, 1meter long

24.7x7mm | Aluminum | For LED Strip | 1meter long

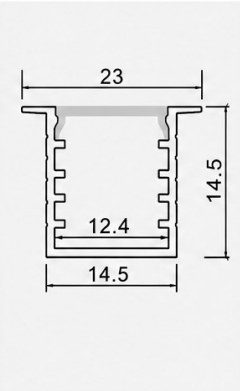

12

ALUMINUM PROFILE FOR LED STRIP

23x14.5mm, 1meter long

23x14.5mm | Aluminum | For LED Strip | 1meter long

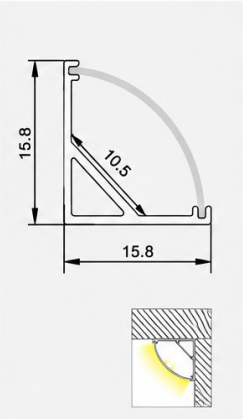

13

ALUMINUM PROFILE FOR LED STRIP

15.8x15.8mm, 1meter long

15.8x15.8mm | Aluminum | For LED Strip | 1meter long

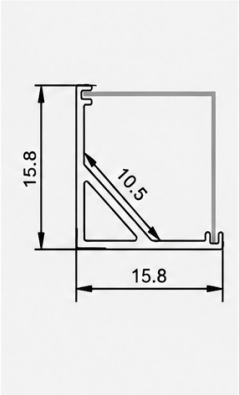

14

ALUMINUM PROFILE FOR LED STRIP

15.8x15.8mm square, 1meter long

15.8x15.8mm | Aluminum | For LED Strip | 1meter long

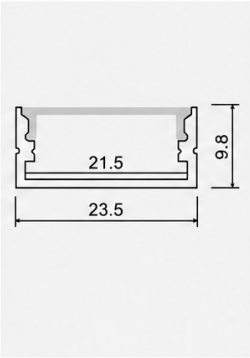

15

ALUMINUM PROFILE FOR LED STRIP

23.5x9.8mm, 1meter long

23.5x9.8mm | Aluminum | For LED Strip | 1meter long

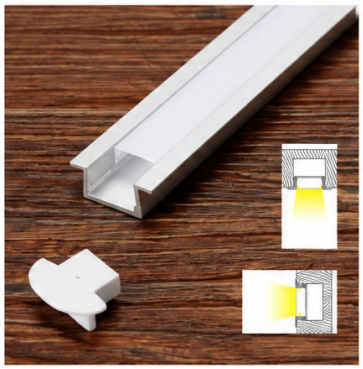

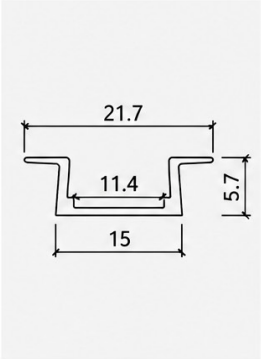

16

ALUMINUM PROFILE FOR LED STRIP

21.7x5.7mm, 1meter long

21.7x5.7mm | Aluminum | For LED Strip | 1meter long

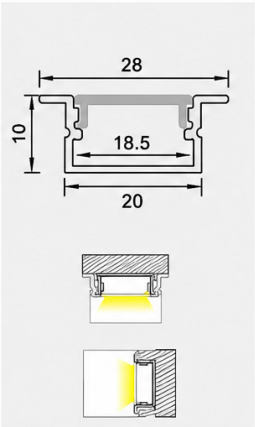

17

ALUMINUM PROFILE FOR LED STRIP

28x10mm, 1meter long

28x10mm | Aluminum | For LED Strip | 1meter long

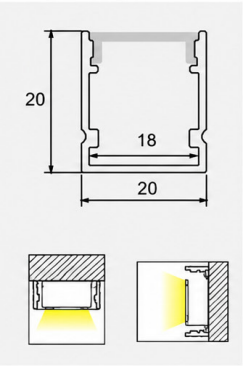

18

ALUMINUM PROFILE FOR LED STRIP

20x20mm, 1meter long

20x20mm | Aluminum | For LED Strip | 1meter long

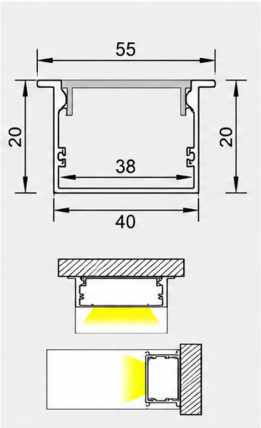

19

ALUMINUM PROFILE FOR LED STRIP

55x20mm, 1meter long

55x20mm | Aluminum | For LED Strip | 1meter long

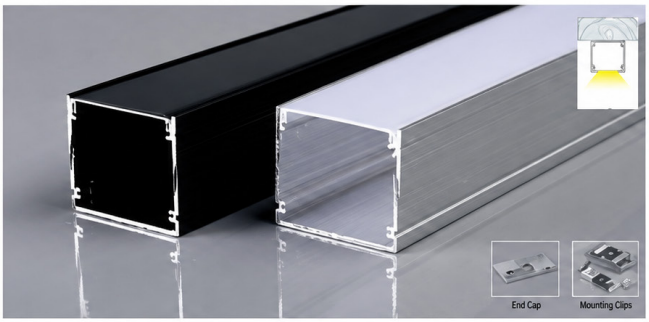

3030



20

ALUMINUM PROFILE FOR LED STRIP

30x30mm, 1meter long

30x30mm | Aluminum | For LED Strip | 1meter long

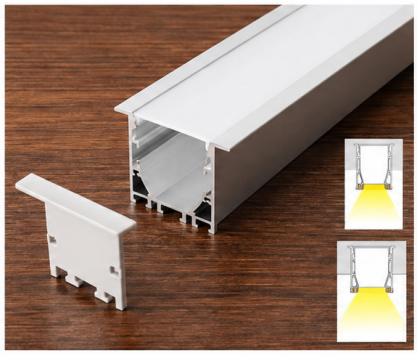



21

ALUMINUM PROFILE FOR LED STRIP

56x40mm, 1meter long

56x40mm | Aluminum | For LED Strip | 1meter long





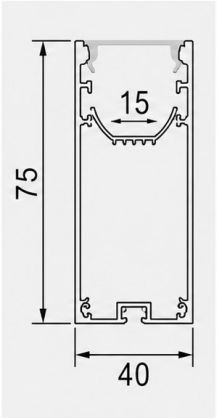

22

ALUMINUM PROFILE FOR LED STRIP

40x75mm, 1meter long

40x75mm | Aluminum | For LED Strip | 1meter long

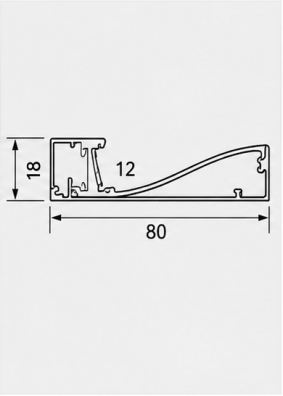

23

ALUMINUM PROFILE FOR LED STRIP

80x18mm, 1meter long

80x18mm | Aluminum | For LED Strip | 1meter long

PERFILES MAGNÉTICOS

MAGNETIC PROFILES
FOR LED LIGHTING

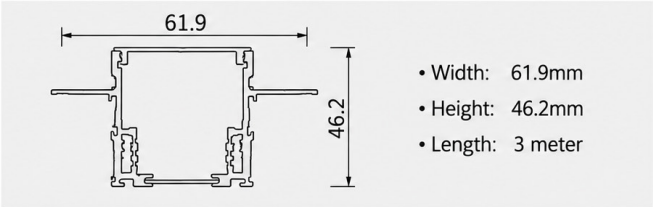

- Width: 61.9mm
- Height: 46.2mm
- Length: 3 meter

24 | ALUMINUM PROFILE RAIL TRACK

W61.9*H46.2mm, 3 meter long

W61.9*H46.2mm | Aluminum | Rail Track | 3 meter long

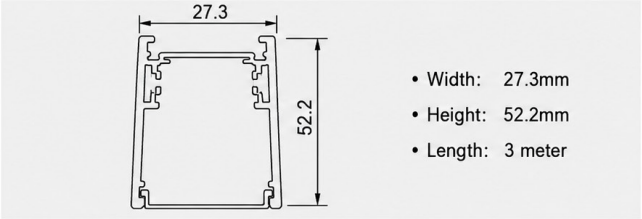

- Width: 27.3mm
- Height: 52.2mm
- Length: 3 meter

25 | ALUMINUM PROFILE RAIL TRACK

W27.3*H52.2mm, 3 meter long

W27.3*H52.2mm | Aluminum | Rail Track | 3 meter long

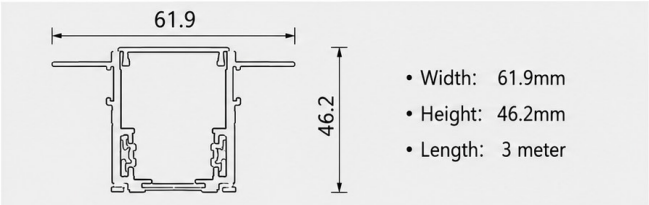

- Width: 61.9mm
- Height: 46.2mm
- Length: 3 meter

26 | ALUMINUM PROFILE RAIL TRACK

W61.9*H46.2mm, 3 meter long

W61.9*H46.2mm | Aluminum | Rail Track | 3 meter long

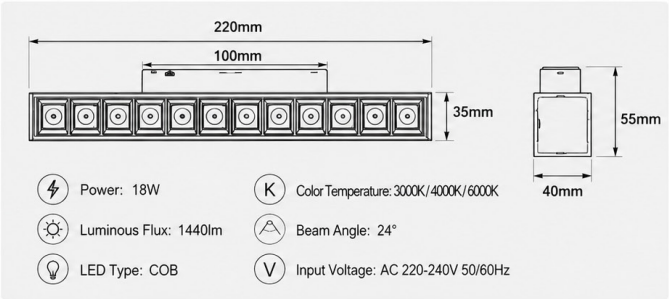

27 | LED GRILLE LIGHT 18W

18W Power · Grille Design · COB LED · Beam Angle 24° · High Quality

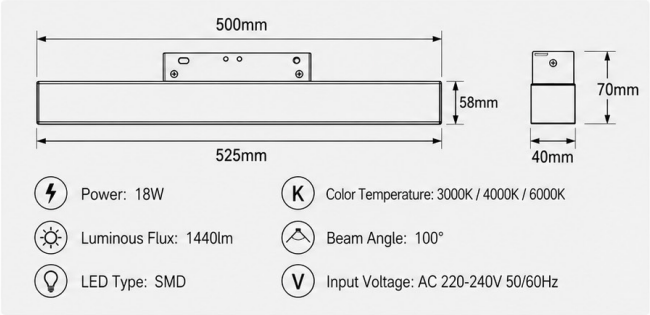

28 | LED FLOOD LIGHT 18W

18W Power · Flood Light · SMD LED · Beam Angle 100° · High Quality

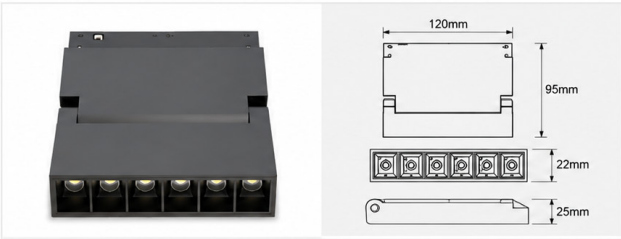

Power: 6W
Luminous Flux: 480lm
LED Type: COB
Color Temperature: 3000K / 4000K / 6000K
Beam Angle: 24°
Input Voltage: AC 220-240V 50/60Hz

29 | LED FOLDING LIGHT, 6W

Power: 6W · Folding Design · COB LED · Beam Angle 24° · High Quality

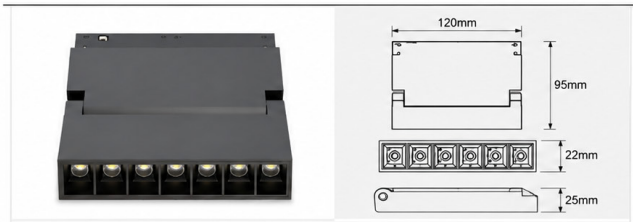

Power: 12W
Luminous Flux: 960lm
LED Type: COB
Color Temperature: 3000K / 4000K / 6000K
Beam Angle: 24°
Input Voltage: AC 220-240V 50/60Hz

30 | LED FOLDING LIGHT, 12W

Power: 12W · Folding Design · COB LED · Beam Angle 24° · High Quality

Power: 6W
Luminous Flux: 480lm
LED Type: COB
Color Temperature: 3000K / 4000K / 6000K
Beam Angle: 24°
Input Voltage: AC 220-240V 50/60Hz

31 | LED FOLDING GRILLE LIGHT, 6W

6W Power · Folding Design · Grille Design · Beam Angle 24° · High Quality

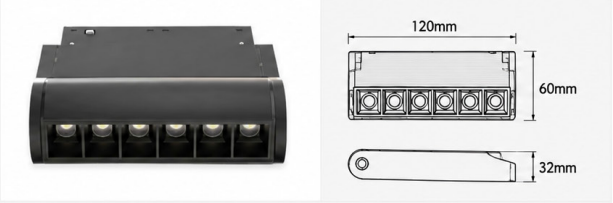

Power: 12W
Luminous Flux: 960lm
LED Type: COB
Color Temperature: 3000K / 4000K / 6000K
Beam Angle: 24°
Input Voltage: AC 220-240V 50/60Hz

32 | LED FOLDING GRILLE LIGHT, 12W

12W Power · Folding Design · Grille Design · Beam Angle 24° · High Quality

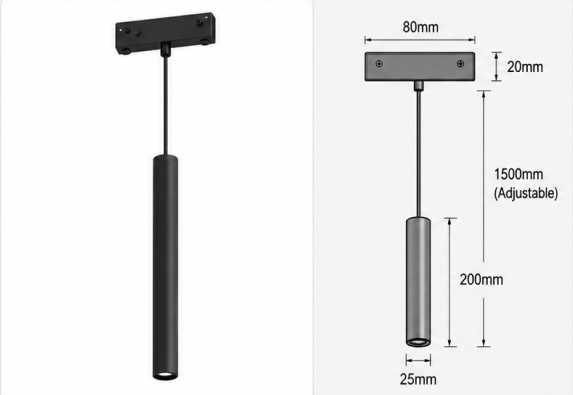

Power: 7W
Luminous Flux: 560lm
LED Type: COB
Color Temperature: 3000K / 4000K / 6000K
Beam Angle: 24°
Input Voltage: AC 220-240V 50/60Hz
Material: Aluminum
Color: Black

33 | LED DROPLINE LIGHT, 7W

7W Power · Dropline Design · COB LED · Beam Angle 24° · High Quality

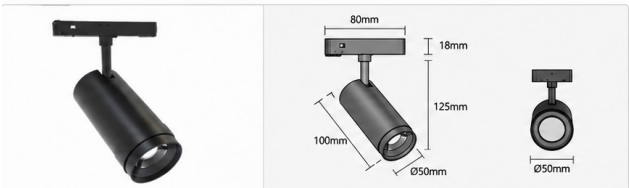

Power: 12W
Luminous Flux: 960lm
LED Type: COB
Color Temperature: 3000K / 4000K / 6000K
Beam Angle: 15°-60° (Zoomable)
Input Voltage: AC 220-240V 50/60Hz
CRI: ≥90
Material: Aluminum

34 | LED ZOOMABLE TRACK LIGHT, 12W

12W Power · Zoomable · COB LED · Beam Angle · High Quality

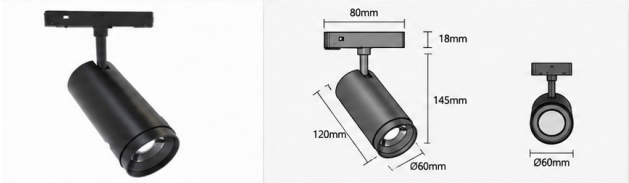

Power: 20W
Luminous Flux: 1600lm
LED Type: COB
Color Temperature: 3000K / 4000K / 6000K
Beam Angle: 15°-60° (Zoomable)
Input Voltage: AC 220-240V 50/60Hz
CRI: ≥90
Material: Aluminum

35 | LED ZOOMABLE TRACK LIGHT, 20W

20W Power · Zoomable · COB LED · Beam Angle · High Quality

2m
suspend wire
× 2

Mounting
plate
× 2

Ceiling
anchor
× 2

Screws &
expansion bolts
× 2 sets

Product Name	2m suspend wire
Length	2 meter
Material	Steel wire + Zinc alloy
Load Capacity	Max. 20kg (each)
Application	For suspended lighting fixtures

36 |

2m SUSPEND WIRE

2pcs/bag

- 2 Meter Length
- Max. 20kg (each)
- Steel Wire
- Strong & Durable
- Easy Installation

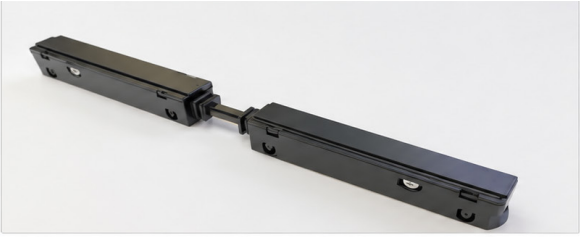

DIMENSIONS (mm)

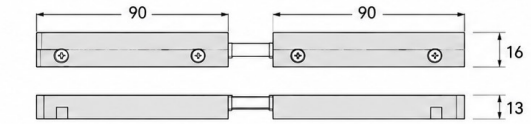

Product Name	Through conductive module
Rated Voltage	48V DC
Rated Current	10A
Material	PC + Copper
Color	Black
Length	180mm (90mm + 90mm)
Installation	Built-in track installation
Application	For connecting power in magnetic track lighting system

37 |

THROUGH CONDUCTIVE MODULE

Used to electrically connect and transmit power between two sections of magnetic track.

- 48V DC Voltage
- 10A Current
- Stable Connection
- Easy Installation
- Safe & Reliable

FEATURES

- Built-in conductive design for seamless power transmission.
- Reliable connection ensures stable performance.
- Easy installation and secure fit.
- Compatible with standard magnetic track systems.

38 |

20 RECESSED

CORNER

100 x 100 mm

- 100 x 100 mm
- RECESSED
- ALUMINUM
- EASY INSTALL

39

SINGLE COLOR BUILT-IN POWER SUPPLY

100W

100W | DC 12V | BUILT-IN | CERTIFIED

40

SINGLE COLOR BUILT-IN POWER SUPPLY

200W

200W | DC 12V | BUILT-IN | CERTIFIED

41

SINGLE COLOR BUILT-IN C POWER SUPPLY

100W

100W | BUILT-IN C | DC 12V | SAFE & RELIABLE

42

SINGLE COLOR BUILT-IN C POWER SUPPLY

200W

200W | BUILT-IN C | DC 12V | SAFE & RELIABLE

FUENTES Y ACCESORIOS

POWER SUPPLIES
FOR LED LIGHTING

43

SINGLE COLOR 48V EXTERNAL POWER SUPPLY 350W

350W | DC 48V | SAFE & RELIABLE | COOLING FAN | CERTIFIED

INPUT VOLTAGE	100-240V AC
OUTPUT VOLTAGE	48V DC
POWER	350W
TYPE	EXTERNAL POWER SUPPLY

44

100W POWER SUPPLY FOR LED STRIP LIGHT

12V: 50 pcs, 24V: 50 pcs.

100W | DC OUTPUT | SAFE & RELIABLE | COOLING FAN | CERTIFIED

POWER	100W
OUTPUT VOLTAGE	12V / 24V DC
OUTPUT CURRENT	8.5A (12V) / 4.2A (24V)
INPUT VOLTAGE	110/220V AC ±15%
FREQUENCY	50/60Hz
EFFICIENCY	≥ 85%
OPERATING TEMP.	-10°C ~ +60°C
DIMENSION	199 X 98 X 42 mm

45

200W POWER SUPPLY FOR LED STRIP LIGHT

12V: 25 pcs, 24V: 25 pcs.

200W | DC OUTPUT | SAFE & RELIABLE | COOLING FAN | CERTIFIED

POWER	200W
OUTPUT VOLTAGE	12V / 24V DC
OUTPUT CURRENT	16.7A (12V) / 8.3A (24V)
INPUT VOLTAGE	110/220V AC ±15%
FREQUENCY	50/60Hz
EFFICIENCY	≥ 85%
OPERATING TEMP.	-10°C ~ +60°C
DIMENSION	199 X 98 X 42 mm

46

300W POWER SUPPLY FOR LED STRIP LIGHT

12V: 15 pcs, 24V: 15 pcs.

300W | DC OUTPUT | SAFE & RELIABLE | COOLING FAN | CERTIFIED

POWER	300W
OUTPUT VOLTAGE	12V / 24V DC
OUTPUT CURRENT	25A (12V) / 12.5A (24V)
INPUT VOLTAGE	110/220V AC ±15%
FREQUENCY	50/60Hz
EFFICIENCY	≥ 85%
OPERATING TEMP.	-10°C ~ +60°C
DIMENSION	215 X 115 X 50 mm

47

400W POWER SUPPLY FOR LED STRIP LIGHT

12V: 15 pcs, 24V: 15 pcs.

400W | DC OUTPUT | SAFE & RELIABLE | COOLING FAN | CERTIFIED

POWER	400W
OUTPUT VOLTAGE	12V / 24V DC
OUTPUT CURRENT	33.4A (12V) / 16.7A (24V)
INPUT VOLTAGE	110/220V AC ±15%
FREQUENCY	50/60Hz
EFFICIENCY	≥ 85%
OPERATING TEMP.	-10°C ~ +60°C
DIMENSION	215 X 115 X 50 mm

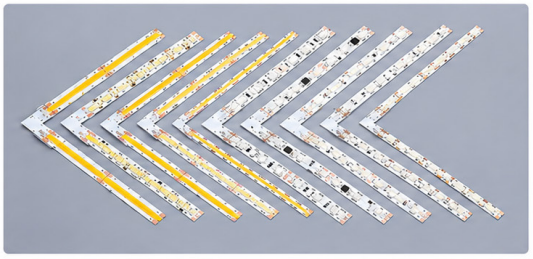

8mm COB LED Strip

10mm COB LED Strip

Easy Connection

48

L CONNECTOR

FOR 8mm/10mm COB LED STRIP LIGHT (SINGLE COLOR)

L SHAPE | 8mm / 10mm | EASY INSTALL | DC 12V/24V | SAFE & RELIABLE

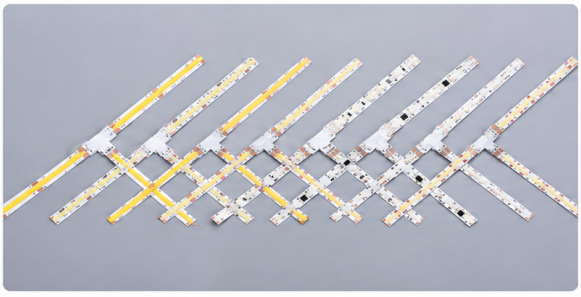

8mm COB LED Strip

10mm COB LED Strip

T Connection

49

T CONNECTOR

FOR 8mm/10mm COB LED STRIP LIGHT (SINGLE COLOR)

T SHAPE | 8mm / 10mm | EASY INSTALL | DC 12V/24V | SAFE & RELIABLE

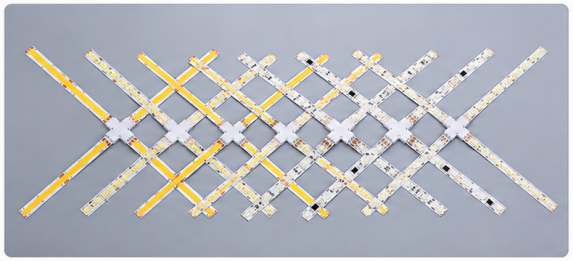

8mm COB LED Strip

10mm COB LED Strip

X Connection

50

X CONNECTOR

FOR 8mm/10mm COB LED STRIP LIGHT (SINGLE COLOR)

X SHAPE | 8mm / 10mm | EASY INSTALL | DC 12V/24V | SAFE & RELIABLE

51

PLUG CONECTORES 110V

110V AC | 2 PIN | SAFE & RELIABLE | DURABLE | EASY TO INSTALL

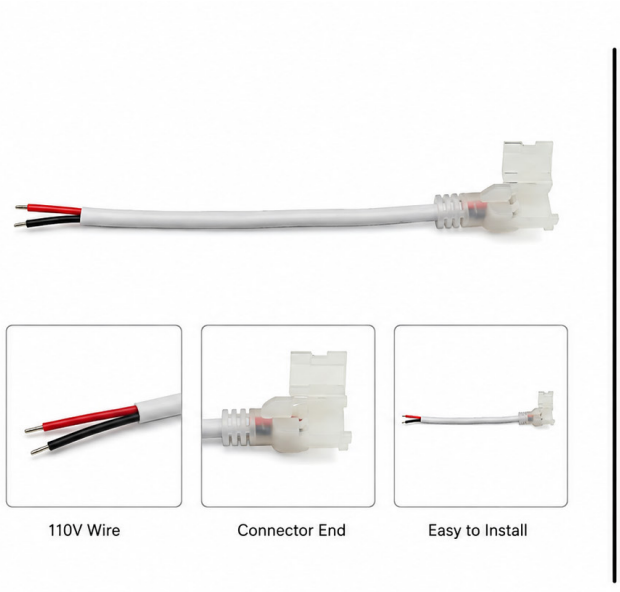

52

WIRE CONECTORES 110V

110V AC | 2 WIRE | SAFE & RELIABLE | DURABLE | EASY TO INSTALL

Novalux

Lighting fixtures

ILUMINACIÓN QUE TRANSFORMA

+503 6869-8360

www.novalux.com