

LIGHT IN MOTION

SOLUCIONES DE ILUMINACIÓN
PARA ESPACIOS QUE INSPIRAN

Iluminación LED · Perfiles · Sistemas magnéticos
Fuentes · Accesorios

 **Novalux**
Lighting fixtures



TIRAS LED Y CONTROLADORES

LED STRIPS
& CONTROLLERS

01 |

COB LED STRIP

12V · 10 mm · 528 LED/m

WARM WHITE
250 mNEUTRAL WHITE
250 mCOOL WHITE
250 m

COB



12V DC



10 mm



528 LED/m

02 |

COB LED STRIP RGBW

24V · 12 mm · 784 LED/m



COB



24V DC



12 mm



784 LED/m

03 |

RGBW REMOTE CONTROLLER

DC 12-24V RGBW Remote controller



RGBW



12-24V DC



RF 2.4G

04 |



COB LED STRIP RGBCW

24V · 12 mm · 840 LED/m



COB



24V DC



12 mm



840 LED/m

05 |



RGBCW REMOTE CONTROLLER

DC 12-24V RGBCW Remote controller



RGBCW



12-24V DC



RF 2.4G

06 |



RGBIC LED STRIP

12V · 10 mm · 60 LED/m



RGBIC



12V DC



10 mm



60 LED/m



07 |

RGBIC BLUETOOTH REMOTE CONTROLLER

DC 12-24V RGBIC Bluetooth Remote controller



RGBIC



12-24V DC



Bluetooth

16 Million
Colors

08 |

SMD2835 LED STRIP

DC 12V · 8mm width · 120 LEDs/m.

650 meters warm white,
500 meters neutral white, 500 meters cool white



SMD2835



DC 12V



8mm




120 LEDs/m

PERFILES

ALUMINUM PROFILES
FOR LED STRIPS



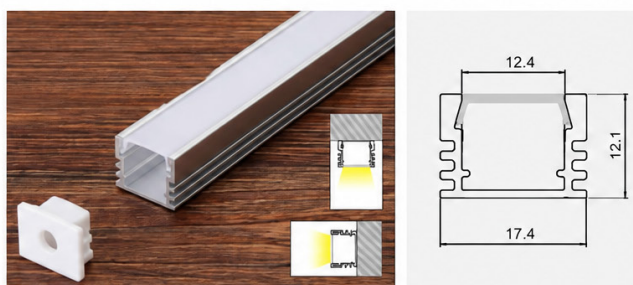

09 |

ALUMINUM PROFILE FOR LED STRIP

17.4x12mm, 1meter long



17.4x12mm




Aluminum



For LED Strip



1meter long

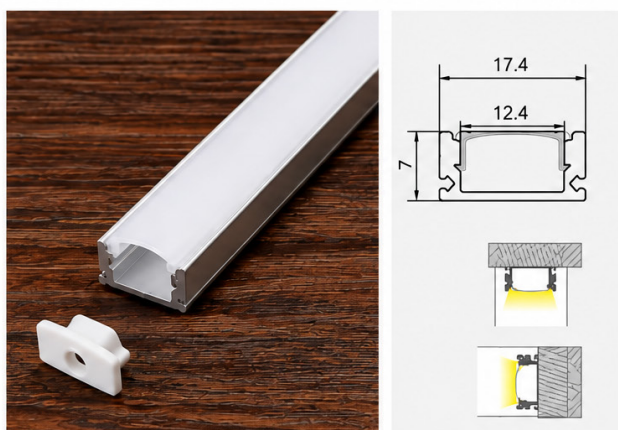

10 |

ALUMINUM PROFILE FOR LED STRIP

17.4x7mm, 1meter long



17.4x7mm




Aluminum



For LED Strip



1meter long

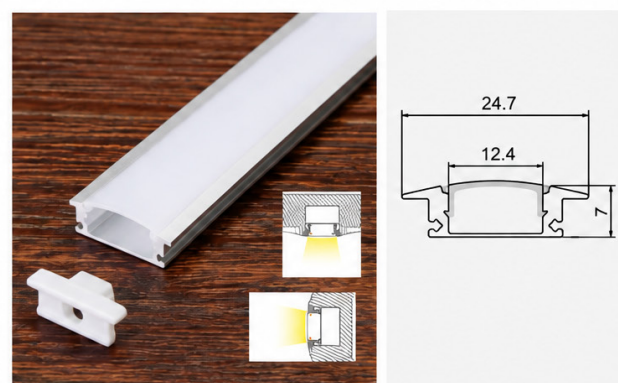

11 |

ALUMINUM PROFILE FOR LED STRIP

24.7x7mm, 1meter long



24.7x7mm




Aluminum



For LED Strip



1meter long

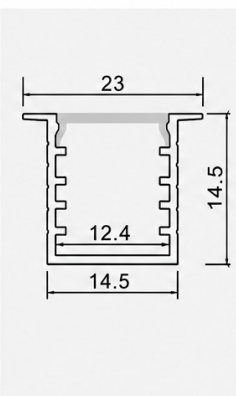

12 |

ALUMINUM PROFILE FOR LED STRIP

23x14.5mm, 1meter long



23x14.5mm




Aluminum



For LED Strip



1meter long

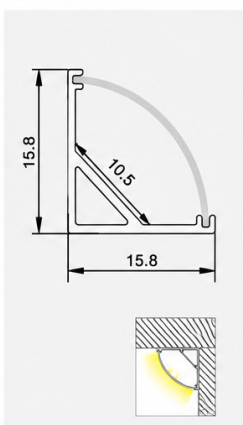

13 |

ALUMINUM PROFILE FOR LED STRIP

15.8x15.8mm, 1meter long



15.8x15.8mm





Aluminum



For LED Strip



1meter long

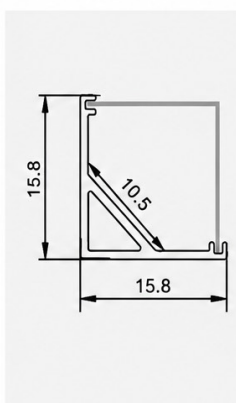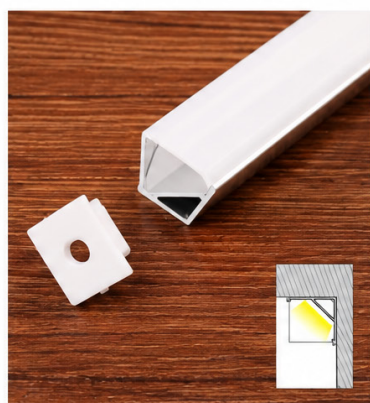

14 |

ALUMINUM PROFILE FOR LED STRIP

15.8x15.8mm square, 1meter long



15.8x15.8mm




Aluminum



For LED Strip



1meter long

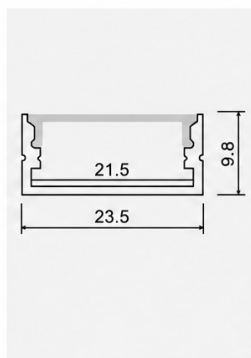

15 |

ALUMINUM PROFILE FOR LED STRIP

23.5x9.8mm, 1meter long



23.5x9.8mm




Aluminum



For LED Strip



1meter long

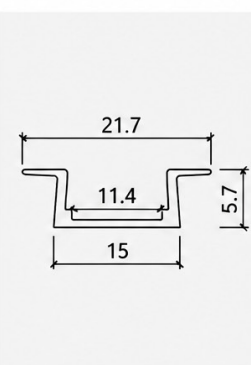

16 |

ALUMINUM PROFILE FOR LED STRIP

21.7x5.7mm, 1meter long



21.7x5.7mm




Aluminum



For LED Strip



1meter long

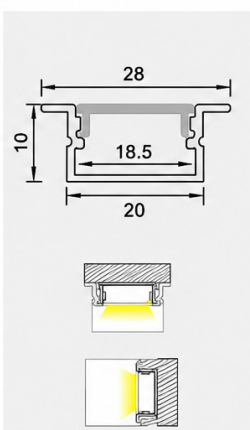

17 |

ALUMINUM PROFILE FOR LED STRIP

28x10mm, 1meter long



28x10mm




Aluminum



For LED Strip



1meter long

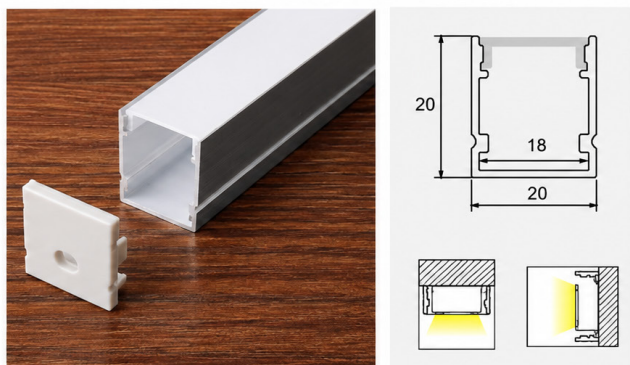**18 |****ALUMINUM PROFILE
FOR LED STRIP**

20x20mm, 1meter long



20x20mm




Aluminum



For LED Strip



1meter long

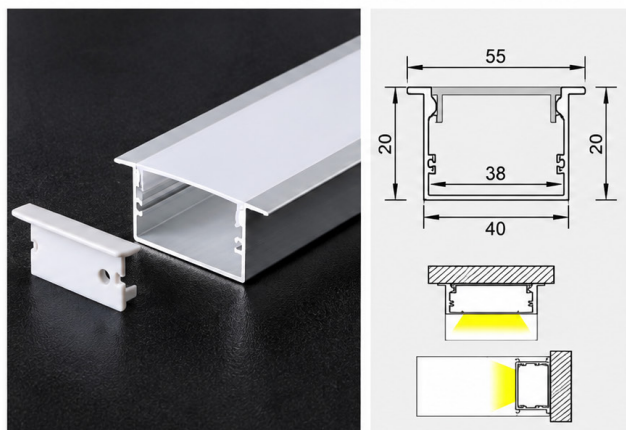**19 |****ALUMINUM PROFILE
FOR LED STRIP**

55x20mm, 1meter long



55x20mm




Aluminum



For LED Strip



1meter long

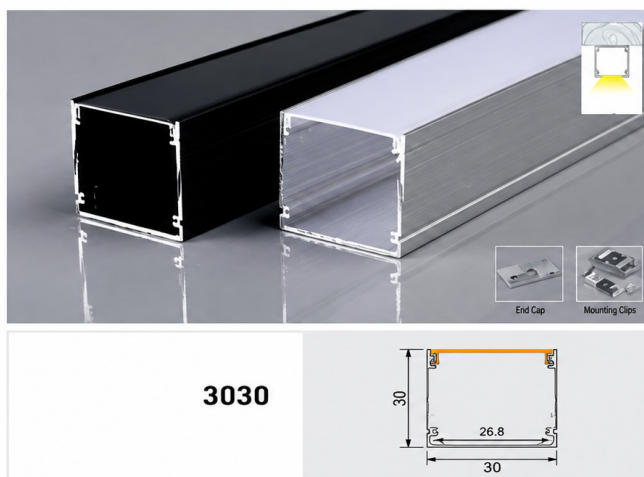**20 |****ALUMINUM PROFILE
FOR LED STRIP**

30x30mm, 1meter long



30x30mm




Aluminum



For LED Strip



1meter long

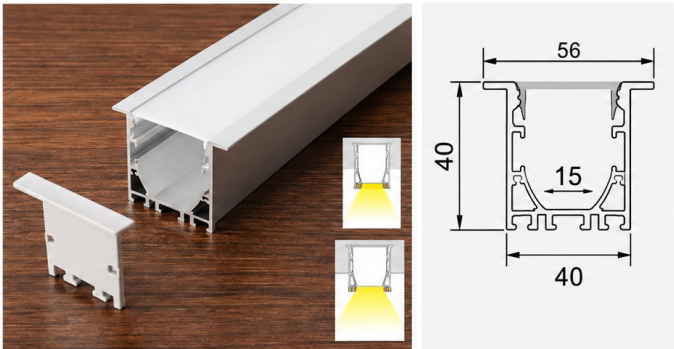

21 |

ALUMINUM PROFILE FOR LED STRIP

56x40mm, 1meter long



56x40mm




Aluminum



For LED Strip



1meter long

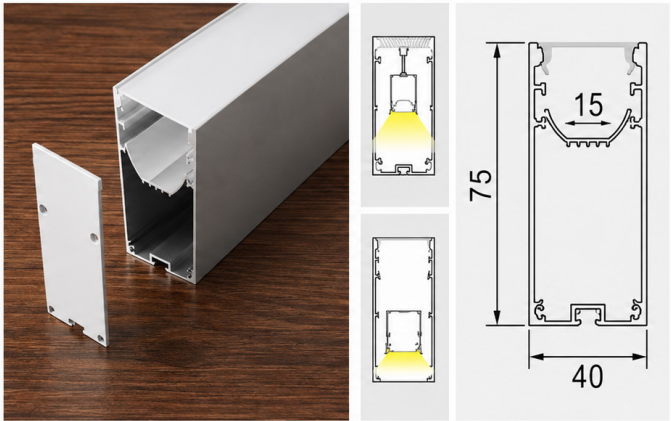

22 |

ALUMINUM PROFILE FOR LED STRIP

40x75mm, 1meter long



40x75mm




Aluminum



For LED Strip



1meter long

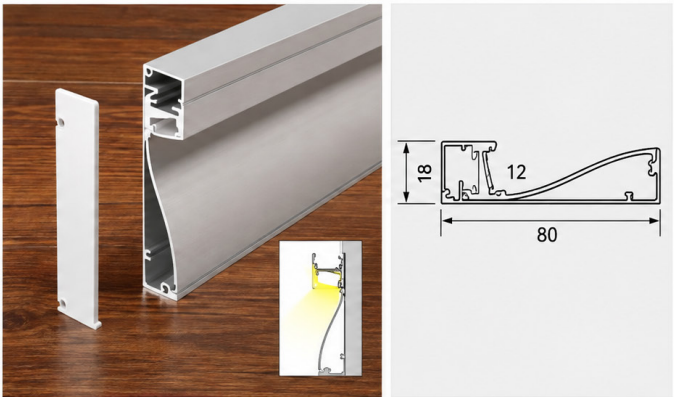

23 |

ALUMINUM PROFILE FOR LED STRIP

80x18mm, 1meter long



80x18mm



Aluminum



For LED Strip




1meter long

PERFILES MAGNÉTICOS

MAGNETIC PROFILES
FOR LED LIGHTING





- Width: 61.9mm
- Height: 46.2mm
- Length: 3 meter

24 |

ALUMINUM PROFILE RAIL TRACK

W61.9*H46.2mm, 3 meter long



W61.9*H46.2mm




Aluminum



Rail Track



3 meter long



- Width: 27.3mm
- Height: 52.2mm
- Length: 3 meter

25 |

ALUMINUM PROFILE RAIL TRACK

W27.3*H52.2mm, 3 meter long



W27.3*H52.2mm




Aluminum



Rail Track



3 meter long



- Width: 61.9mm
- Height: 46.2mm
- Length: 3 meter

26 |

ALUMINUM PROFILE RAIL TRACK

W61.9*H46.2mm, 3 meter long



W61.9*H46.2mm



Aluminum




Rail Track



3 meter long



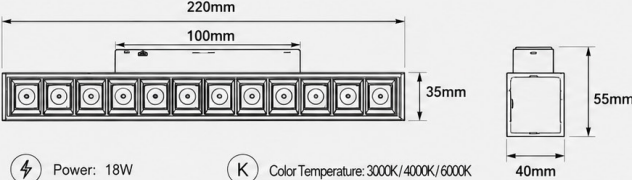

220mm
100mm
35mm
55mm
40mm



Power: 18W



Color Temperature: 3000K / 4000K / 6000K



Luminous Flux: 1440lm



Beam Angle: 24°



LED Type: COB



Input Voltage: AC 220-240V 50/60Hz

27 |

LED GRILLE LIGHT

18W

- 

18W Power
- 

Grille Design
- 

COB LED
- 

Beam Angle 24°
- 

High Quality





500mm
58mm
525mm
70mm
40mm



Power: 18W



Color Temperature: 3000K / 4000K / 6000K



Luminous Flux: 1440lm



Beam Angle: 100°



LED Type: SMD



Input Voltage: AC 220-240V 50/60Hz

28 |

LED FLOOD LIGHT

18W

- 

18W Power
- 


Flood Light
- 

SMD LED
- 

Beam Angle 100°
- 

High Quality





120mm
95mm
22mm
25mm



Power: 6W



Color Temperature: 3000K / 4000K / 6000K



Luminous Flux: 480lm



Beam Angle: 24°



LED Type: COB



Input Voltage: AC 220-240V 50/60Hz

29 |

LED FOLDING LIGHT, 6W

- 

Power: 6W
- 


Folding Design
- 

COB LED
- 

Beam Angle 24°
- 

High Quality





120mm
95mm
22mm
25mm



Power: 12W



Color Temperature: 3000K / 4000K / 6000K



Luminous Flux: 960lm



Beam Angle: 24°



LED Type: COB



Input Voltage: AC 220-240V 50/60Hz

30 |

LED FOLDING LIGHT, 12W

- 


Power: 12W
- 

Folding Design
- 

COB LED
- 

Beam Angle 24°
- 

High Quality



- ⚡ Power: 6W
- 💡 Luminous Flux: 480lm
- 💡 LED Type: COB
- Ⓚ Color Temperature: 3000K / 4000K / 6000K
- Ⓐ Beam Angle: 24°
- Ⓜ Input Voltage: AC 220-240V 50/60Hz

31 |

LED FOLDING GRILLE LIGHT, 6W



6W Power



Folding Design




Grille Design



Beam Angle 24°



High Quality



- ⚡ Power: 12W
- 💡 Luminous Flux: 960lm
- 💡 LED Type: COB
- Ⓚ Color Temperature: 3000K / 4000K / 6000K
- Ⓐ Beam Angle: 24°
- Ⓜ Input Voltage: AC 220-240V 50/60Hz

32 |

LED FOLDING GRILLE LIGHT, 12W



12W Power



Folding Design




Grille Design



Beam Angle 24°



High Quality

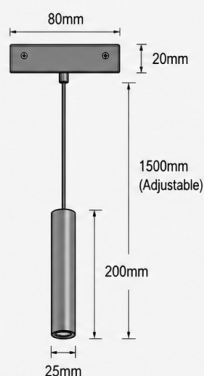

- ⚡ Power: 7W
- 💡 Luminous Flux: 560lm
- 💡 LED Type: COB
- Ⓚ Color Temperature: 3000K / 4000K / 6000K
- Ⓐ Beam Angle: 24°
- Ⓜ Input Voltage: AC 220-240V 50/60Hz
- 🛡 Material: Aluminum
- 🎨 Color: Black

33 |

LED DROPLINE LIGHT, 7W



7W Power



Dropline Design




COB LED



Beam Angle 24°



High Quality



- ⚡ Power: 12W
- 💡 Luminous Flux: 960lm
- 💡 LED Type: COB
- Ⓚ Color Temperature: 3000K / 4000K / 6000K
- Ⓐ Beam Angle: 15°-60° (Zoomable)
- Ⓜ Input Voltage: AC 220-240V 50/60Hz
- Ⓜ CRI: ≥90
- 🛡 Material: Aluminum

34 |

LED ZOOMABLE TRACK LIGHT, 12W



12W Power



Zoomable




COB LED



Beam Angle



High Quality



- ⚡ Power: 20W
- 💡 Luminous Flux: 1600lm
- 💡 LED Type: COB
- Ⓚ Color Temperature: 3000K / 4000K / 6000K
- Ⓐ Beam Angle: 15°-60° (Zoomable)
- Ⓜ Input Voltage: AC 220-240V 50/60Hz
- Ⓜ CRI: ≥90
- 🛡 Material: Aluminum

35 |

LED ZOOMABLE TRACK LIGHT, 20W



20W Power



Zoomable



COB LED



Beam Angle



High Quality





Product Name	2m suspend wire
Length	2 meter
Material	Steel wire + Zinc alloy
Load Capacity	Max. 20kg (each)
Application	For suspended lighting fixtures

36 |

2m SUSPEND WIRE

2pcs/bag

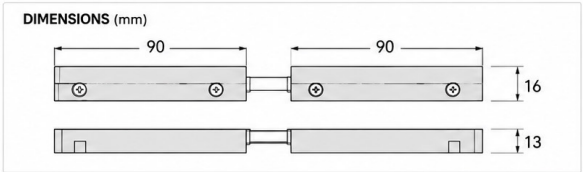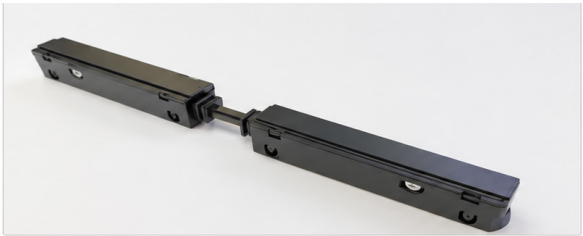

Product Name	Through conductive module
Rated Voltage	48V DC
Rated Current	10A
Material	PC + Copper
Color	Black
Length	180mm (90mm + 90mm)
Installation	Built-in track installation
Application	For connecting power in magnetic track lighting system

37 |

THROUGH CONDUCTIVE MODULE

Used to electrically connect and transmit power between two sections of magnetic track.



- FEATURES**
- Built-in conductive design for seamless power transmission.
 - Reliable connection ensures stable performance.
 - Easy installation and secure fit.
 - Compatible with standard magnetic track systems.



38 |

20 RECESSED CORNER

100 x 100 mm





39 |

**SINGLE COLOR
BUILT-IN POWER SUPPLY**

100W



100W



DC 12V



BUILT-IN



CERTIFIED



40 |

**SINGLE COLOR
BUILT-IN POWER SUPPLY**

200W



200W



DC 12V



BUILT-IN



CERTIFIED



41 |

**SINGLE COLOR
BUILT-IN C POWER SUPPLY**

100W



100W



BUILT-IN C



DC 12V



SAFE & RELIABLE



42 |

**SINGLE COLOR
BUILT-IN C POWER SUPPLY**

200W



200W



BUILT-IN C



DC 12V



SAFE & RELIABLE

FUENTES Y ACCESORIOS

POWER SUPPLIES
FOR LED LIGHTING





43 |

SINGLE COLOR
48V EXTERNAL POWER
SUPPLY 350W



350W



DC 48V



SAFE & RELIABLE



COOLING FAN



CERTIFIED

INPUT VOLTAGE	100-240V AC
OUTPUT VOLTAGE	48V DC
POWER	350W
TYPE	EXTERNAL POWER SUPPLY



44 |

100W POWER SUPPLY
FOR LED STRIP LIGHT

12V: 50 pcs, 24V: 50 pcs.



100W



DC OUTPUT



SAFE & RELIABLE



COOLING FAN



CERTIFIED

POWER	100W
OUTPUT VOLTAGE	12V / 24V DC
OUTPUT CURRENT	8.5A (12V) / 4.2A (24V)
INPUT VOLTAGE	110/220V AC $\pm$ 15%
FREQUENCY	50/60Hz
EFFICIENCY	$\geq$ 85%
OPERATING TEMP.	-10°C ~ +60°C
DIMENSION	199 X 98 X 42 mm



45 |

200W POWER SUPPLY
FOR LED STRIP LIGHT

12V: 25 pcs, 24V: 25 pcs.



200W



DC OUTPUT



SAFE & RELIABLE



COOLING FAN



CERTIFIED

POWER	200W
OUTPUT VOLTAGE	12V / 24V DC
OUTPUT CURRENT	16.7A (12V) / 8.3A (24V)
INPUT VOLTAGE	110/220V AC $\pm$ 15%
FREQUENCY	50/60Hz
EFFICIENCY	$\geq$ 85%
OPERATING TEMP.	-10°C ~ +60°C
DIMENSION	199 X 98 X 42 mm



46 |

**300W POWER SUPPLY
FOR LED STRIP LIGHT**

12V: 15 pcs, 24V: 15 pcs.

300W

12V/24V

SAFE & RELIABLE

COOLING FAN

CERTIFIED

POWER	300W
OUTPUT VOLTAGE	12V / 24V DC
OUTPUT CURRENT	25A (12V) / 12.5A (24V)
INPUT VOLTAGE	110/220V AC ±15%
FREQUENCY	50/60Hz
EFFICIENCY	≥ 85%
OPERATING TEMP.	-10°C ~ +60°C
DIMENSION	215 X 115 X 50 mm



47 |

**400W POWER SUPPLY
FOR LED STRIP LIGHT**

12V: 15 pcs, 24V: 15 pcs.

400W


12V/24V

SAFE & RELIABLE

COOLING FAN

CERTIFIED

POWER	400W
OUTPUT VOLTAGE	12V / 24V DC
OUTPUT CURRENT	33.4A (12V) / 16.7A (24V)
INPUT VOLTAGE	110/220V AC ±15%
FREQUENCY	50/60Hz
EFFICIENCY	≥ 85%
OPERATING TEMP.	-10°C ~ +60°C
DIMENSION	215 X 115 X 50 mm

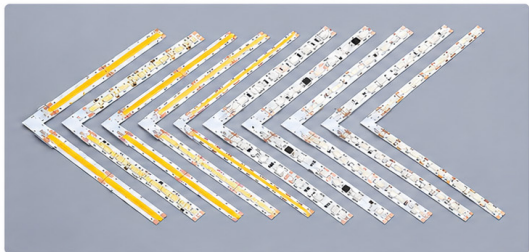

8mm COB LED Strip

10mm COB LED Strip

Easy Connection

48 |

**L CONNECTOR
FOR 8mm/10mm COB LED STRIP LIGHT
(SINGLE COLOR)**


L SHAPE

8mm / 10mm

EASY INSTALL

DC 12V/24V

SAFE & RELIABLE

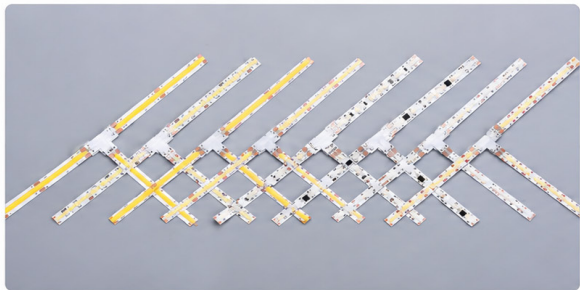

8mm COB LED Strip



10mm COB LED Strip



T Connection

49 |

T CONNECTOR
FOR 8mm/10mm COB LED STRIP LIGHT
(SINGLE COLOR)



T SHAPE



8mm / 10mm




EASY INSTALL



DC 12V/24V



SAFE & RELIABLE

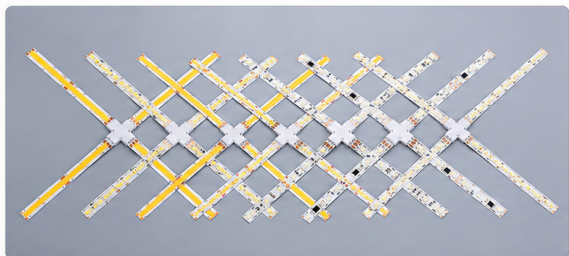

8mm COB LED Strip



10mm COB LED Strip



X Connection

50 |

X CONNECTOR
FOR 8mm/10mm COB LED STRIP LIGHT
(SINGLE COLOR)



X SHAPE



8mm / 10mm




EASY INSTALL



DC 12V/24V




SAFE & RELIABLE

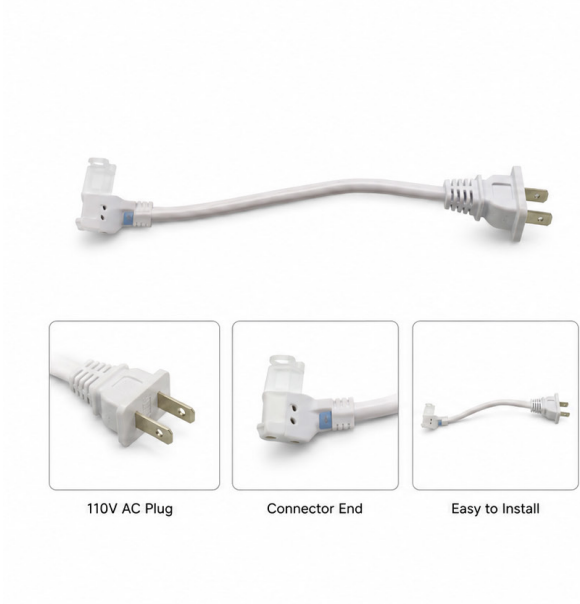

51 |
PLUG CONECTORES 110V

- 110V AC
- 2 PIN
- SAFE & RELIABLE
- DURABLE
- EASY TO INSTALL

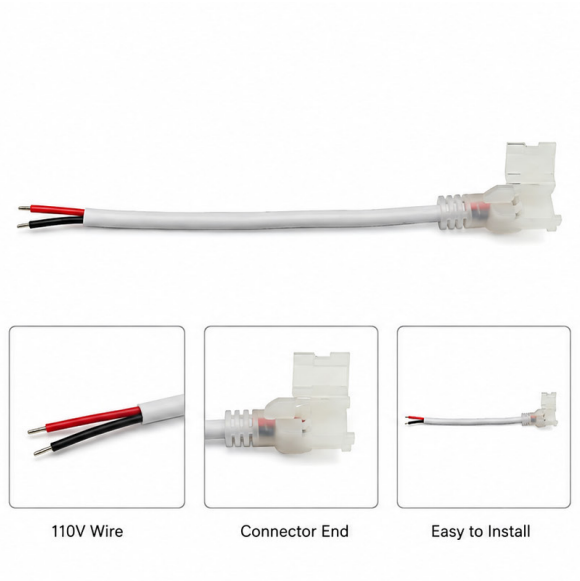

52 |
WIRE CONECTORES 110V

- 110V AC
- 2 WIRE
- SAFE & RELIABLE
- DURABLE
- EASY TO INSTALL



Novalux

Lighting fixtures

ILUMINACIÓN QUE TRANSFORMA

+503 6869-8360

www.novaluxlf.com